



- 1. Aristocrat
- 2. Nautica
- 3. Wave





- 1. Wave
- 2. Aristocrat (Brushed satin)
- 3. Nautica

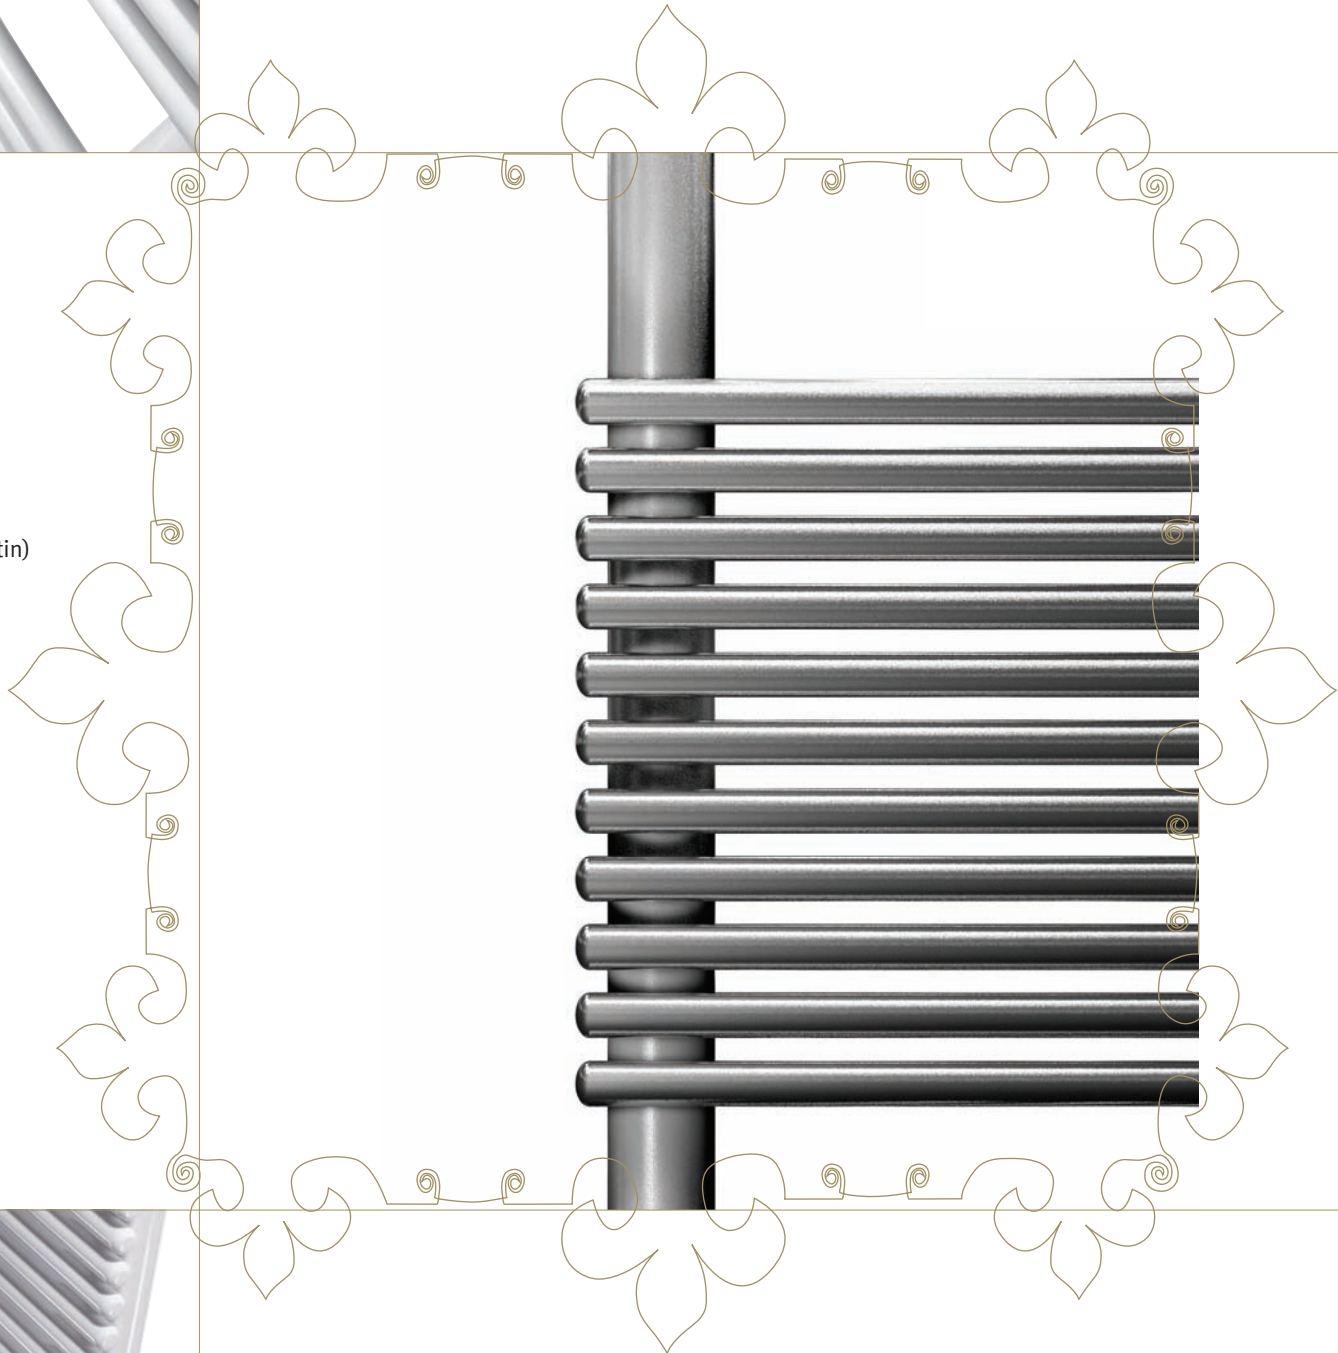

Aristocrat, Wave and Nautica




Aristocrat_Wave_Nautica


Dimensions

ARIW_Aristocrat Wall

NAUW_Nautica Wall



WAVW_Wave Wall

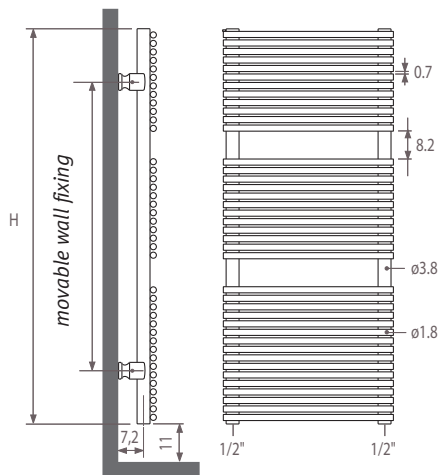


Connections

Standard connection:

Code 18

Connection 18 or 81



Single point connection

Ordering code: specify code 11 or 88 instead of 18. In case of single point pipe connection always use a diffusion tube of min. length of 100 mm (Ø 10 up to 12 mm) with a reduction washer.

With electric element

Order: standard code 18, and order an electric element.




Mixed

Ordering code: standard code 18.

Order an electric element and T-pieces.

- Fit the T-pieces together with the electric heating element for connection to the central heating wet system.
- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator.




Not standard connection without surcharge.

Range

ARIW_Aristocrat Wall

NAUW_Nautica Wall

WAVW_Wave Wall

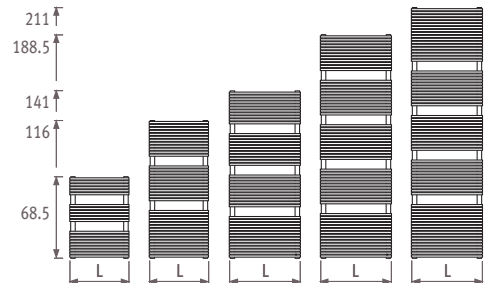

Outputs


Aristocrat Gloss Polished Stainless Steel

code height length colour conn.
ORDERING CODE: ARIW. 068 050. 010 /18

H		L 050	60	80
68	75/65/20	267
	90/70/20	333
116	75/65/20	490
	90/70/20	618
141	75/65/20	...	702	...
	90/70/20	...	890	...
188	75/65/20	...	927	...
	90/70/20	...	1167	...
211	75/65/20	...	1029	1371
	90/70/20	...	1298	1722

Standard delivery

- in gloss polished stainless steel
- connection 18 underneath
- wall fixing
- chrome-plated air vent




Aristocrat Brushed Satin Stainless Steel

code height length colour conn. type
ORDERING CODE: ARIW. 068 050. 011 /18 /SP

H		L 050	60	80
68	75/65/20	318
	90/70/20	399
116	75/65/20	553
	90/70/20	697
141	75/65/20	...	734	...
	90/70/20	...	931	...
188	75/65/20	...	1009	...
	90/70/20	...	1268	...
211	75/65/20	...	1094	1500
	90/70/20	...	1372	1893

Standard delivery

- in brushed satin stainless steel
- connection 18 underneath
- wall fixing
- chrome-plated air vent



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ($\Delta T=50$).



**Nautica**

code height length colour conn.
ORDERING CODE: NAUW. 068 050. XXX /18


H		L 050	060	080
068	75/65/20	404	---	---
	90/70/20	504	---	---
116	75/65/20	723	843	---
	90/70/20	908	1060	---
141	75/65/20	850	991	---
	90/70/20	1070	1245	---
188	75/65/20	1104	1315	---
	90/70/20	1392	1653	---
211	75/65/20	---	1468	1887
	90/70/20	---	1845	2372

Standard delivery

- connection 18 underneath
- wall fixing
- chrome-plated air vent

Standard colours:

- white (233) RAL 9016 glossy
- white (201) RAL 9010 glossy
- sandblast grey metallic 001

**Wave**

code height length colour conn.
ORDERING CODE: WAVW. 068 050. XXX /18


H		L 050	060	080
068	75/65/20	421	---	---
	90/70/20	526	---	---
116	75/65/20	712	857	---
	90/70/20	893	1074	---
141	75/65/20	854	1007	---
	90/70/20	1076	1264	---
188	75/65/20	1116	1336	---
	90/70/20	1402	1673	---
211	75/65/20	---	1498	1953
	90/70/20	---	1877	2445

Standard delivery

- connection 18 underneath
- wall fixing
- chrome-plated air vent


Standard colours:

- white (233) RAL 9016 glossy
- white (201) RAL 9010 glossy
- sandblast grey metallic 001




Options

Electro heating



CODE	WATTS	L
9096.10	450	31.5
9096.11	600	35.5
9096.12	900	51.5
9096.13	1200	66.0
9096.14	1500	82.0

Electro heating element with infra-red operation




Finish: white ABS

- Transmission range: ± 6 m in all directions
- Receiver has to be placed at the back of the radiator
- Insulation Class 1

CODE	WATTS	L
9096.510	600	47
9096.520	900	68

Electric element Eco Comfort




CODE	WATTS	L
9096.70	600	55.0
9096.71	750	60.0
9096.72	900	69.5
9096.73	1000	72.0
9096.74	1250	85.0
9096.75	1500	96.5

Connection electric element


- Fit the electric heating element vertically in the socket 1 or 8. The pressure release valve which is included should be fitted into socket 4 or 5, (3 bar).
- Do not switch the radiator on before filling it completely with water.
- Top up with water after the first total heating up of the radiator.

For more information see Technical info.


T-piece for mixed application



Combination possibilities

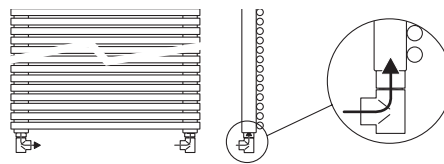

Connection at side or the back with a standard radiator

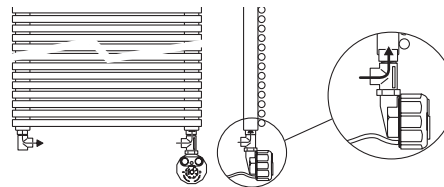

Mixed connection

CODE	colour
TPCE.004.009	chrome
TPCE.004.XXX	201 up to 233
	301 up to 333
<i>fill in colour code</i>	

