
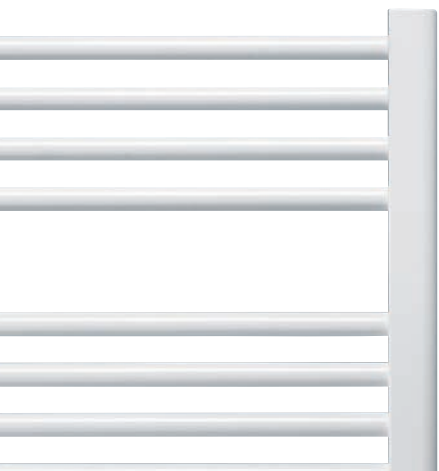


1

2

- 1. Sani Bow
- 2. Sani Basic

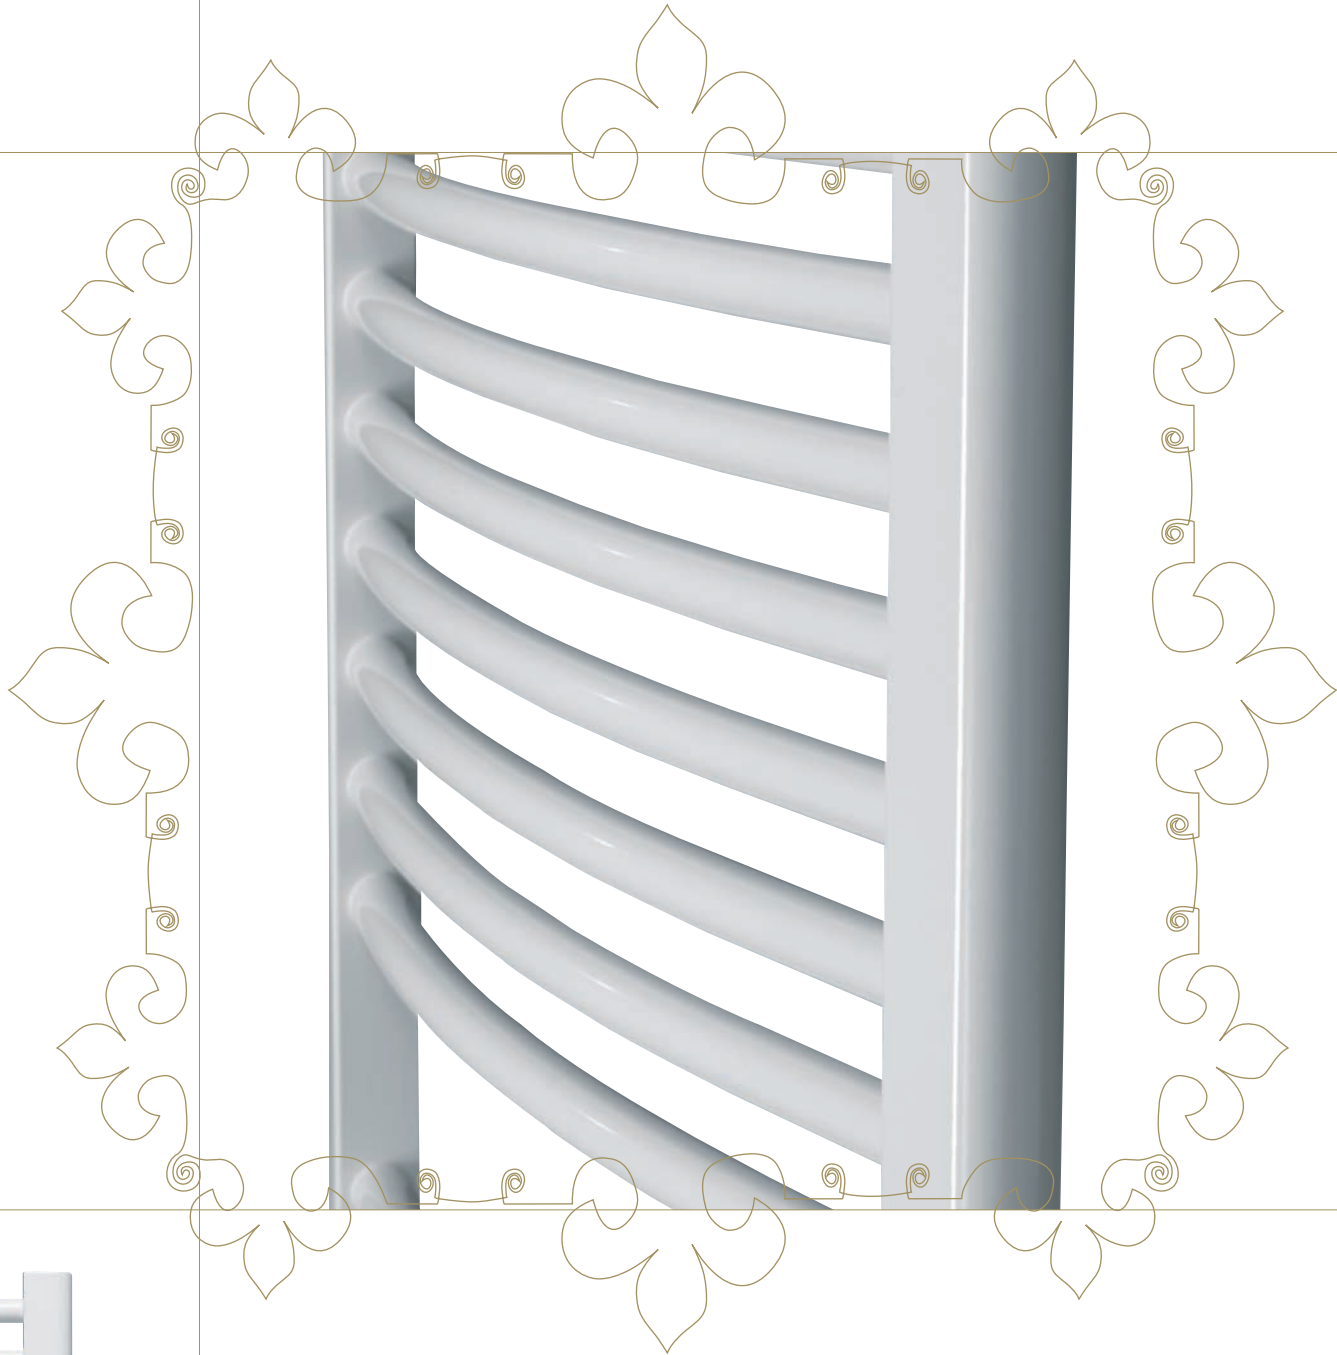


Sani Bow and Sani Basic




Sani Bow and Sani Basic Dimensions

SBAW _Sani Basic Wall

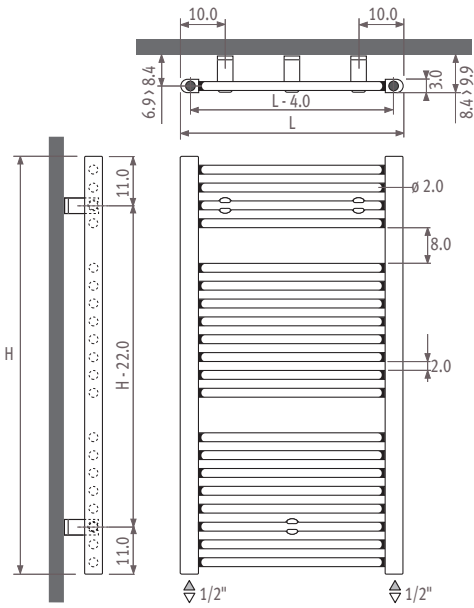


SBOW _Sani Bow Wall

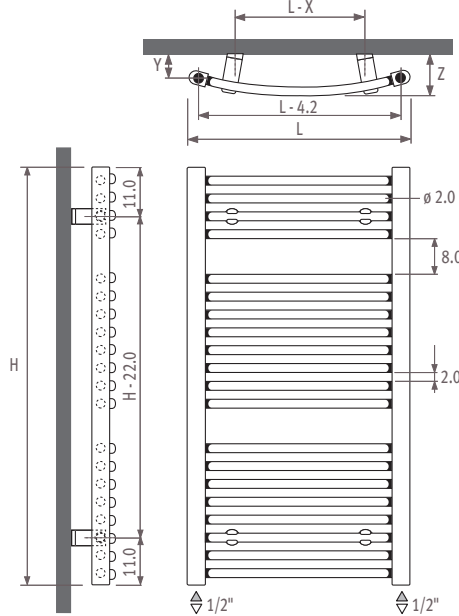

Dimensions in cm


L	050	060	075
X	25.0	22.0	18.5
Y	5.2 - 6.2	5.4 - 6.4	9.3 - 10.3
Z	8.6 - 9.6	9.3 - 10.3	10.5 - 11.5

Range

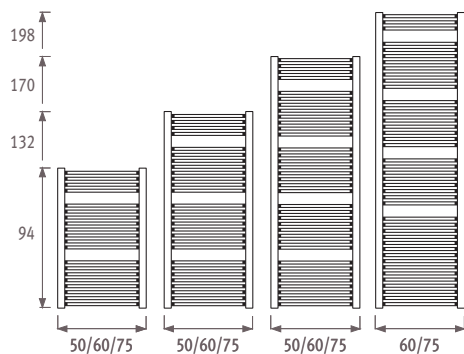

Connections

Code: 1° number = flow
2° number = return



Standard connection

Code 18
Connection 18 or 81

Top end connection

Ordering code specify 45 or 54 instead of 18. Insert pipe included without surcharge, to be mounted in the return, provide an air vent on the central heating tube. No surcharge.

Single point connection

Ordering code specify code 11 or 88 instead of 18. In case of single point connection always use a diffusion tube of min. length of 100 mm (Ø 10 up to 12 mm) with a reduction washer.

With electric element

Ordering code: standard code 18, and order an electric element.




Mixed

Ordering code: standard code 18. Order an electric element and T-pieces.

- Fit the T-piece together with the electrical heating element for connection to the central heating wet system.

- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator. Not possible with a radiator on feet.





Not standard connection without surcharge.

Outputs

Sani Bow

code height length colour conn.
ORDERING CODE: SBOW. 094 050. XXX /18

H		L 050	060	075
094	75/65/20	444	528	656
	90/70/20	556	660	820
	s			
	o			
132	75/65/20	618	732	911
	90/70/20	774	915	1138
	s			
	o			
170	75/65/20	788	938	1159
	90/70/20	987	1174	1447
	s			
	o			
198	75/65/20	---	1122	1373
	90/70/20	---	1405	1713
	s			
	o			



Standard delivery

- connection 18 underneath
- wall fixing
- chrome-plated air vent and drain cock



Standard colours:

- white (233) RAL 9016 glossy
- white (201) RAL 9010 glossy
- sandblast grey metallic (001)

Sani Basic

code height length colour conn.
ORDERING CODE: SBAW. 094 050. XXX /18

H		L 050	060	075
094	75/65/20	427	505	620
	90/70/20	537	636	780
	s			
	ot			
132	75/65/20	605	706	865
	90/70/20	762	889	1088
	s			
	o			
170	75/65/20	775	906	1107
	90/70/20	977	1140	1391
	s			
	o			
198	75/65/20	---	1081	1317
	90/70/20	---	1361	1655
	s			
	ot			



Standard delivery

- connection 18 underneath
- wall fixing
- chrome-plated air vent and drain cock

Standard colours:


- white (233) RAL 9016 glossy
- white (201) RAL 9010 glossy
- sandblast grey metallic (001)



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ($\Delta T=50$).


Options

Electro heating



CODE	WATTS	L
9096.10	450	31.5
9096.11	600	35.5
9096.12	900	51.5
9096.13	1200	66.0
9096.14	1500	82.0


Electro heating element with infra-red operation



- Finish: white ABS
- Transmission range: ± 6 m in all directions
 - Receiver has to be placed at the back of the radiator
 - Insulation Class 1

CODE	WATTS	L
9096.510	600	47
9096.520	900	68

Electric element Eco Comfort




CODE	WATTS	L
909670	600	55.0
9096.71	750	60.0
9096.72	900	69.5
9096.73	1000	72.0
9096.74	1250	85.0
9096.75	1500	96.5

Connection electric element

- Fit the electric heating element vertically in the socket 1 or 8. The pressure release valve which is included should be fitted into socket 4 or 5, (3 bar).
- Do not switch the radiator on before filling it completely with water.
- Top up with water after the first total heating up of the radiator.


For more information see *Technical info*.

T-piece for mixed application




T-piece

Combination possibilities with T-piece

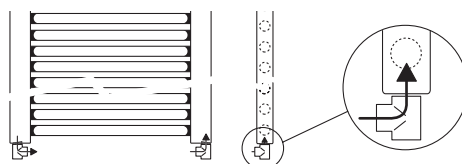


Connection at side or the back with a standard radiator.

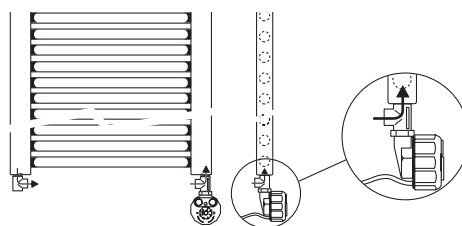

Mixed connection

CODE	colour
TPCE.004.009	chrome
TPCE.004.XXX	201 up to 233
	301 up to 333
<i>fill in colour code</i>	

Insert pipe for top end connection



Will be delivered without surcharge if the top end connection code is indicated 45 or 54 instead of 18.

CODE	H radiator	L
9097.0840	94	84
9097.1280	132	128
9097.1660	170	166
9097.1960	198	196

