




Sani Panel




Sani Panel

Dimensions

SPAW _Sani Panel Wall

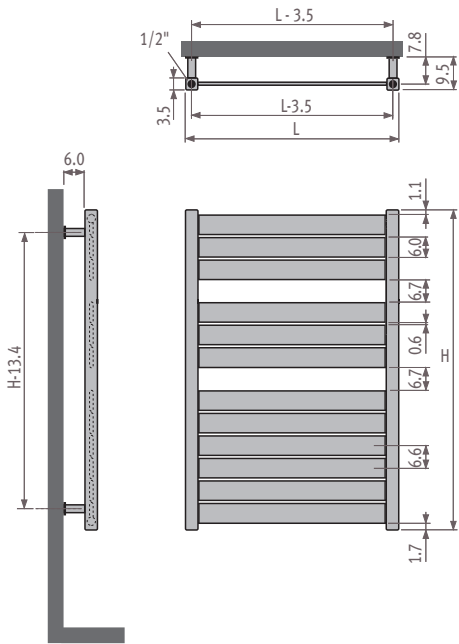


Range

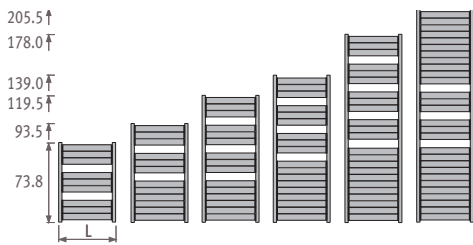

Connections

Code: 1° number = flow
2° number = return



Standard connection

Code 18
Connection 18 or 81

Top end connection

Ordering code specify 45 or 54 instead of 18. Insert pipe included without surcharge, to be mounted in the return, provide an air vent on the central heating tube. No surcharge.

Side end connection


Ordering code specify 32, 67, 41 or 58 instead of 18, no surcharge.

Single point connection

Ordering code: specify code 11 or 88 instead of 18. In case of single point connection always use a diffusion tube of min. length of 100 mm (Ø 10 up to 12 mm) with a reduction washer. Not possible with a radiator on feet.

With electric element

Ordering code: standard code 18, and order an electric element. Not possible with a radiator on feet.



Mixed

Ordering code: standard code 18. Order an electric element and T-pieces.


- Fit the T-piece together with the electrical heating element for connection to the central heating wet system.
- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator. Not possible with a radiator on feet.



Not standard connection without surcharge.


Fixings

Standard wall fixing




Ceiling fixing


The ceiling fixing is identical to the feet. It has however a length of 50 cm which can be adapted by the contractor on site.



Feet




Side end fixing



Configurations on size: see parts.

Outputs



Standard delivery

- connection 18 underneath
- wall fixing
- chrome-plated air vent and drain cock

Standard colours:

- white (233) RAL 9016 glossy
- white (201) RAL 9010 glossy
- sandblast grey metallic (001)

Sani Panel

code height length colour conn.
ORDERING CODE: SPAW. 073 040. XXX /18


H		L 040	050	060	070	080	100
73	75/65/20	318	386	455	524	593	731
	90/70/20	403	490	578	666	754	931
93	75/65/20	414	503	593	683	772	951
	90/70/20	524	637	752	867	981	1209
119	75/65/20	506	615	724	833	942	1160
	90/70/20	640	779	917	1056	1195	1473
139	75/65/20	594	721	848	975	1102	1356
	90/70/20	750	912	1073	1235	1396	1719
178	75/65/20	732	887	1041	1196	1351	1660
	90/70/20	923	1120	1315	1512	1708	2101
205	75/65/20	860	1039	1218	1397	1576	1934
	90/70/20	1083	1309	1536	1762	1989	2442

Surcharge for freestanding model SPAF

Description:

- 2 feet
- 2 ceiling fixings
- 3 chrome-plated T-pieces 1/2"
- 1 chrome-plated air vent 1/2"

Freestanding models available in heights 178 and 205 cm.



Ex. SPAF. 178 040. XXX/18

CODE

st. colour

other


Code SPAF
instead of SPAW

Surcharge for positioning perpendicular to the wall SPAS

Description:

- 2 side end fixings
- 1 foot
- 1 chrome-plated air vent 1/2"

Surcharge for positioning perpendicular to the wall available in heights 178 and 205 cm.

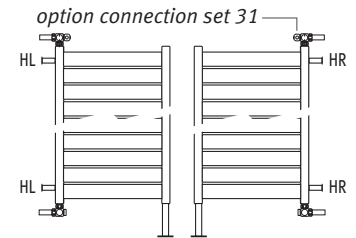

Ex. SPAS. 178 040. XXX/41/HL

Ex. SPAS. 178 040. XXX/58/HR

CODE

st. colour

other


Code SPAS
instead of SPAW



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ($\Delta T=50$).


Options

Electro heating



CODE	WATTS	L
9096.10	450	31.5
9096.11	600	35.5
9096.12	900	51.5
9096.13	1200	66.0
9096.14	1500	82.0


Electro heating element with infra-red operation



- Finish: white ABS
- Transmission range: ± 6 m in all directions
 - Receiver has to be placed at the back of the radiator
 - Insulation Class 1

CODE	WATTS	L
9096.510	600	47
9096.520	900	68

Electric element Eco Comfort




CODE	WATTS	L
9096.70	600	55.0
9096.71	750	60.0
9096.72	900	69.5
9096.73	1000	72.0
9096.74	1250	85.0
9096.75	1500	96.5

Connection electric element

- Fit the electric heating element vertically in the socket 1 or 8. The pressure release valve which is included should be fitted into socket 4 or 5, (3 bar).
- Do not switch the radiator on before filling it completely with water.
- Top up with water after the first total heating up of the radiator.


For more information see *Technical info*.

T-piece for mixed application




T-piece

Combination possibilities with T-piece

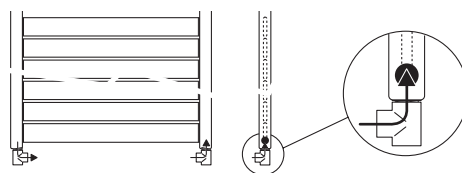


Connection at side or the back with a standard radiator

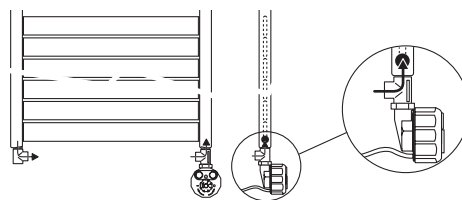

Mixed connection

CODE	colour
TPCE.004.009	chrome
TPCE.004.XXX	201 up to 233
	301 up to 333
<i>fill in colour code</i>	

Insert pipe for top end connection



Will be delivered without surcharge if the top end connection code is indicated 45 or 54 instead of 18.

CODE	H radiator	L
9097.0540	73	54
9097.0840	93	84
9097.1100	119	110
9097.1280	139	128
9097.1660	178	166
9097.1960	205	196

