



1

2

- 1. Sani Ronda
- 2. Sani Ronda with double-angled valve

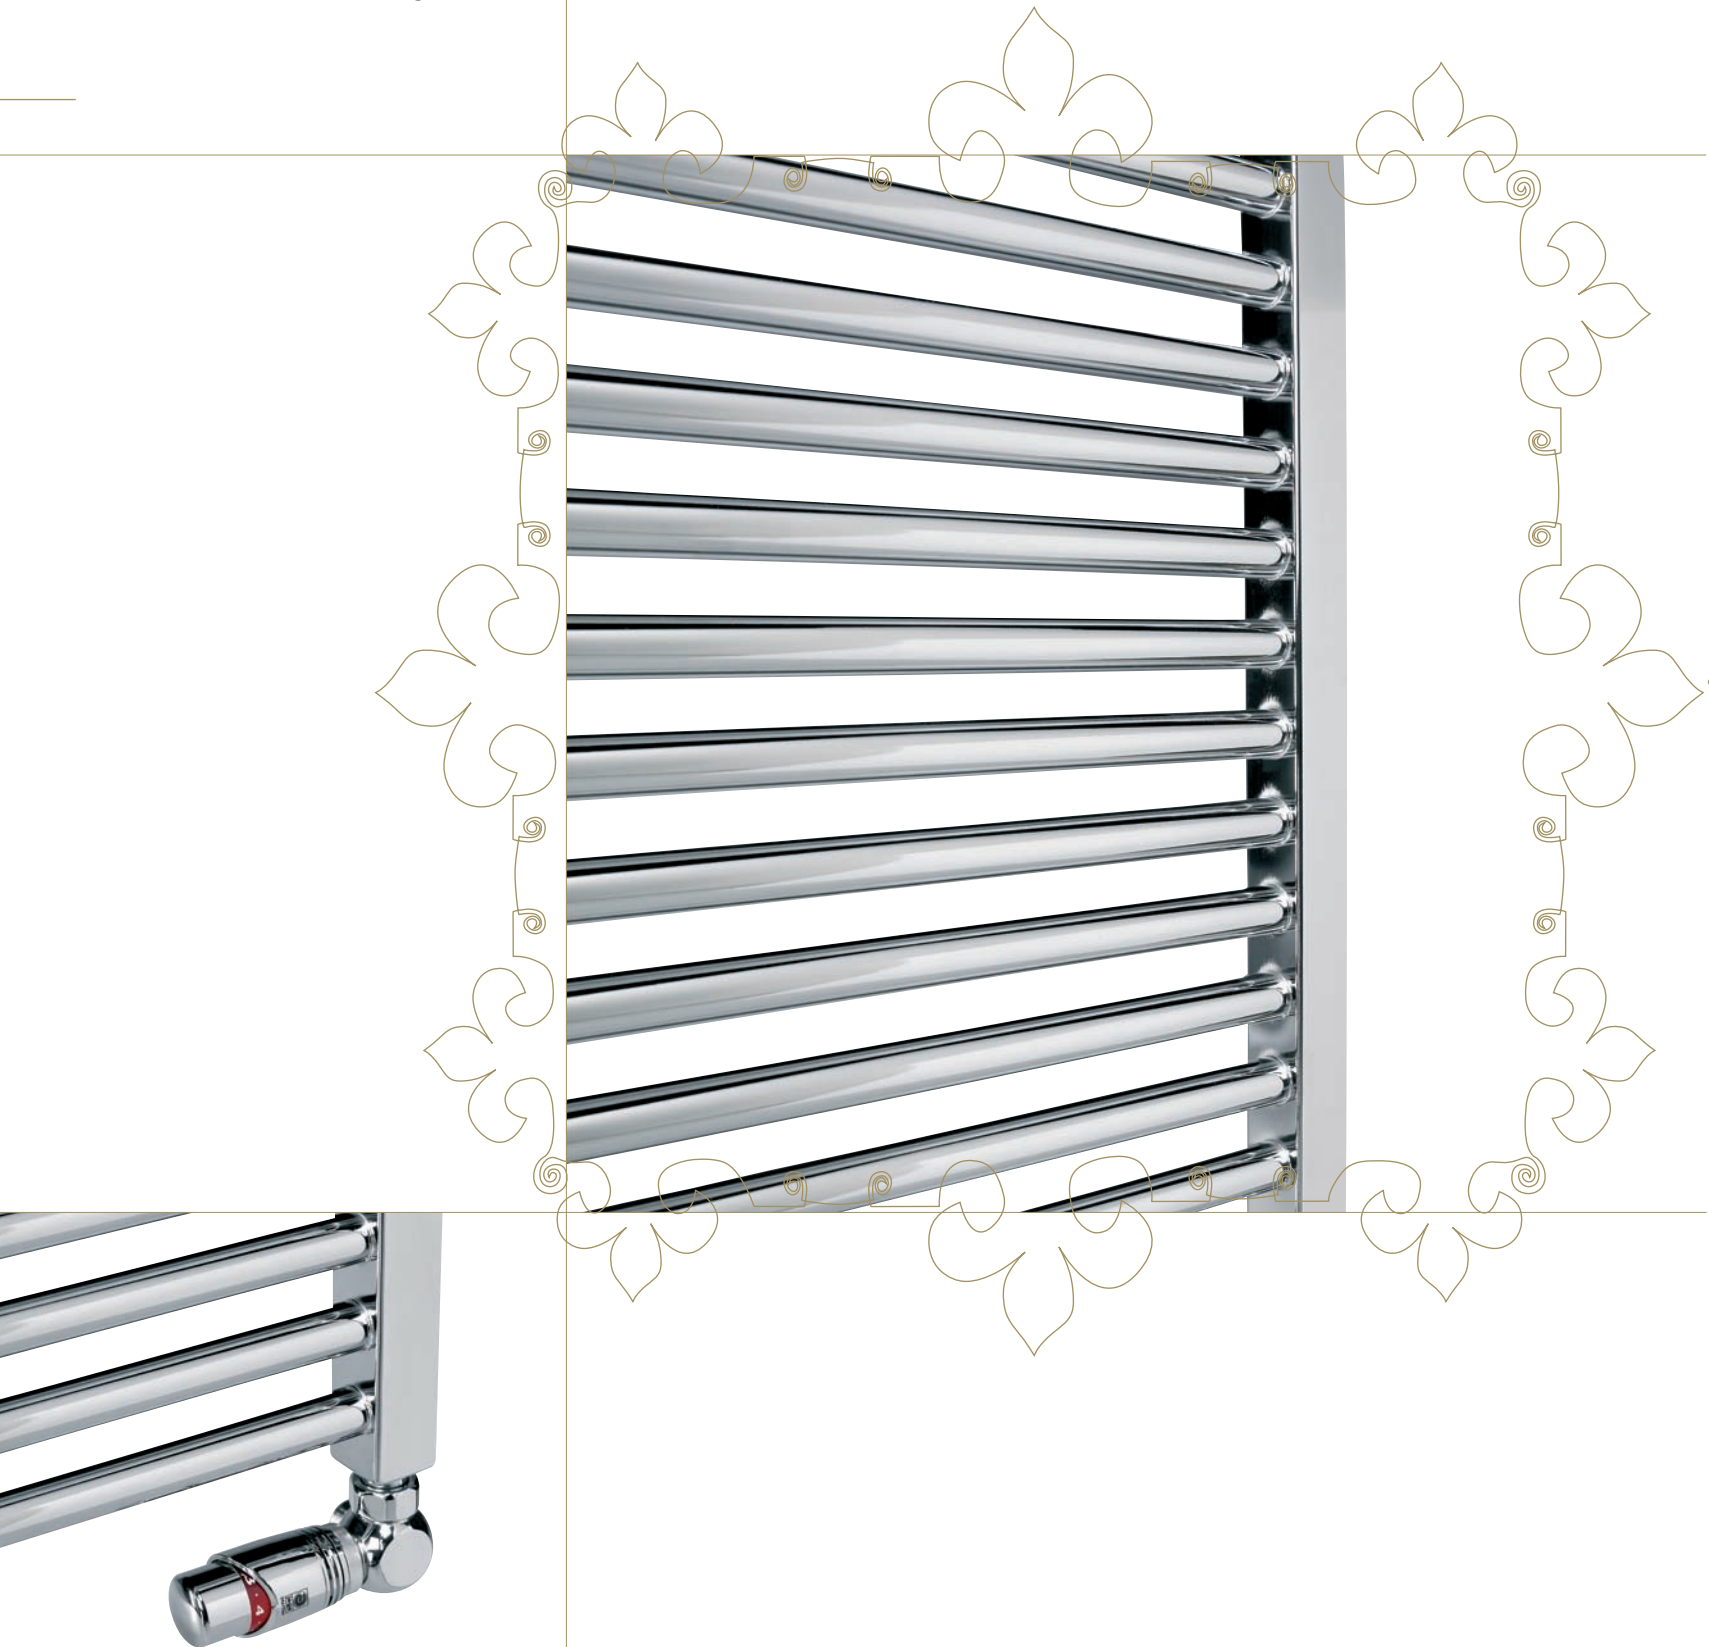


Sani Ronda

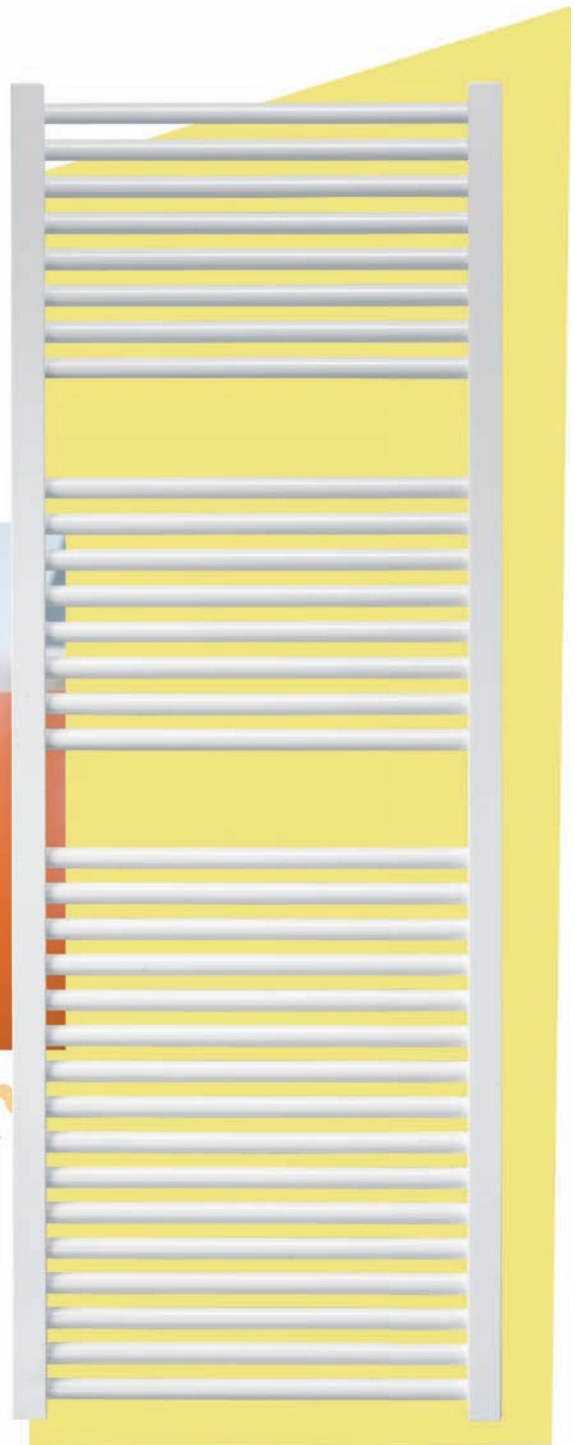


Sani Ronda

Dimensions

SROW _Sani Ronda Wall

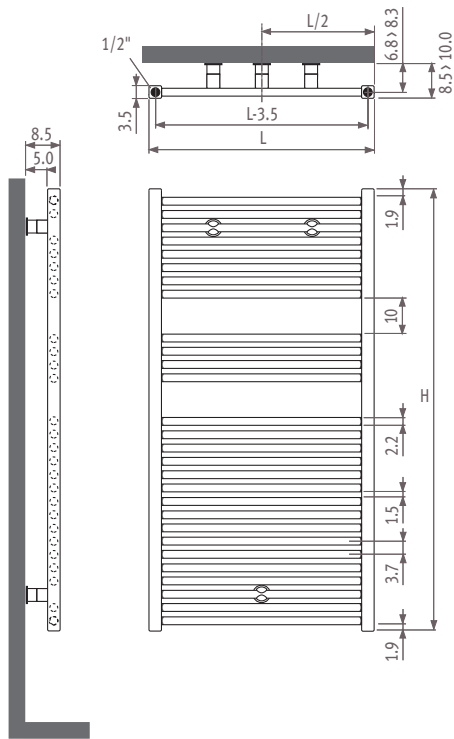


Range

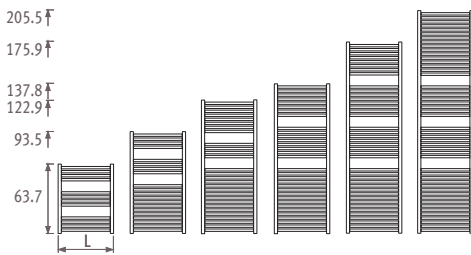

Connections

Code: 1° number = flow
2° number = return



Standard connection

Code 18
Connection 18 or 81

Central connection:

Ordering code: specify code MM instead of 18.
Flow left or right.
Extra charge: **23,10 €**.

Top end connection

Ordering code specify 45 or 54 instead of 18.
Insert pipe included without surcharge, to be mounted in the return, provide an air vent on the central heating tube. No surcharge.

Side end connection:

Ordering code specify 32, 67, 41 or 58 instead of 18, no surcharge.

Single point connection

Ordering code specify code 11 or 88 instead of 18. In case of single point connection always use a diffusion tube of min. length of 100 mm (Ø 10 up to 12 mm) with a reduction washer. Not possible with a radiator on feet. No surcharge.

With electric element

Ordering code: standard code 18, and order an electric element. Not possible with a radiator on feet.




Mixed

Ordering code: standard code 18. Order an electric element and T-pieces.
- Fit the T-piece together with the electrical heating element for connection to the central heating wet system.
- Never isolate the radiator from the expansion system, in other words never cut off the return of the radiator. Not possible with a radiator on feet.


Fixings

Standard wall fixing




Ceiling fixing


The ceiling fixing is identical to the feet. It has however a length of 50 cm which can be adapted by the contractor on site.



Feet




Side end fixing



Configurations on size: see parts.

Outputs



Standard delivery

- connection 18 underneath
- wall fixing
- chrome-plated air vent and drain cock

Standard colours:


- white (233) RAL 9016 glossy
- white (201) RAL 9010 glossy
- sandblast grey metallic (001)

Surcharge for freestanding model SROF

Description:

- 2 feet
- 2 ceiling fixings
- 1 chrome-plated T-piece 1/2"
- 1 chrome-plated air vent 1/2"

Freestanding models available in heights 175 and 205 cm.



option connection set 42

Ex. SROF. 175 040. XXX/MM

Sani Ronda

code height length colour conn.
ORDERING CODE: SROW. 063 040. XXX /18

H		L 040	050	060	070	080	100
063	75/65/20	268	322	376	429	483	590
	90/70/20	337	406	474	542	610	746
093	75/65/20	407	494	581	668	755	929
	90/70/20	513	624	734	845	955	1176
122	75/65/20	546	665	784	903	1023	1261
	90/70/20	690	841	993	1144	1296	1599
137	75/65/20	617	752	887	1022	1157	1427
	90/70/20	781	953	1124	1295	1467	1810
175	75/65/20	766	931	1097	1262	1428	1759
	90/70/20	973	1182	1393	1602	1813	2233
205	75/65/20	923	1118	1314	1509	1705	2096
	90/70/20	1175	1422	1671	1919	2167	2663

(*)=Output chrome = -35%

CODE


Code **SROF**
instead of **SROW**

Surcharge for positioning perpendicular to the wall SROS

Description:

- 2 side end fixings
- 1 foot
- 1 chrome-plated air vent 1/2"
- 2 drain cocks 1/2"

Positioning perpendicular to the wall available in heights 175 and 205 cm.

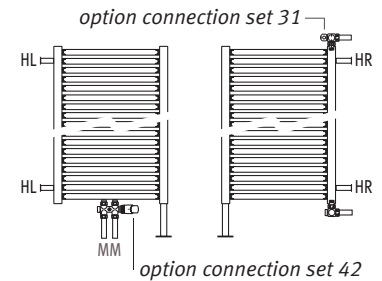

Ex. SROS. 175 040. XXX/MM/HL

Ex. SROS. 175 040. XXX/58/HR

CODE


Code **SROS**
instead of **SROW**
- standard connection (41 or 58):
- central connection (MM):



Output measured in accordance with EN442, at a water temperature of 75/65 and a room temperature of 20°C ($\Delta T=50$).


Options

Electro heating



CODE	WATTS	L
9096.10	450	31.5
9096.11	600	35.5
9096.12	900	51.5
9096.13	1200	66.0
9096.14	1500	82.0


Electro heating element with infra-red operation



- Finish: white ABS
- Transmission range: ± 6 m in all directions
 - Receiver has to be placed at the back of the radiator
 - Insulation Class 1

CODE	WATTS	L
9096.510	600	47
9096.520	900	68

Electric element Eco Comfort




CODE	WATTS	L
9096.70	600	55.0
9096.71	750	60.0
9096.72	900	69.5
9096.73	1000	72.0
9096.74	1250	85.0
9096.75	1500	96.5

Connection electric element

- Fit the electric heating element vertically in the socket 1 or 8. The pressure release valve which is included should be fitted into socket 4 or 5, (3 bar).
- Do not switch the radiator on before filling it completely with water.
- Top up with water after the first total heating up of the radiator.


For more information see Technical info.

T-piece for mixed application




T-piece

Combination possibilities with T-piece

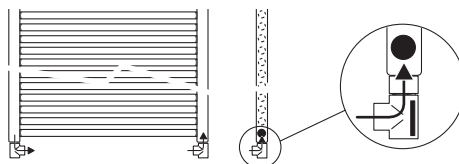


Connection at side or the back with a standard radiator

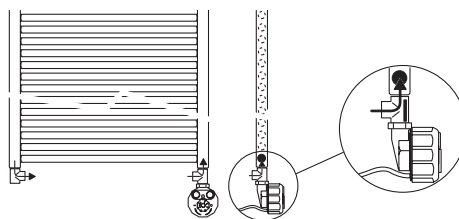

Mixed connection

CODE	colour
TPCE.004.009	chrome
TPCE.004.XXX	201 up to 233
	301 up to 333
<i>fill in colour code</i>	

Insert pipe for top end connection



Will be delivered without surcharge if the top end connection code is indicated 45 or 54 instead of 18.

CODE	H radiator	L
9097.0540	63	54
9097.0840	93	84
9097.1100	122	110
9097.1280	137	128
9097.1660	175	166
9097.1960	205	196

